

Vacuum Truck Blowers

TRUCKSTAR MV-18" Series



FLOW USA

1-877-FLOWUSA

TRUCKSTAR MV-18" Series

Same Truck, More Lift!

Drop in a Truckstar® blower from Hibon and achieve 18" Hg of continuous duty vacuum without a cumbersome heat shroud. The Truckstar blower is road-ready with intrinsic wash-down protection and our tri-seal shaft-sealing system to prevent leaks.

Designed with our proprietary computer modeling system, the Truckstar blower represents the latest in vacuum pump technology in an affordable package.

18" Hg at a competitive price, now that's something that will give you a lift!



Roots* 624 - 824 drop-in capable (inch shaft / ANSI flanges)

Features and Benefits

- 18" Hg vacuum is standard.
- Tri-seal shaft sealing system.
- Centrally timed.
- Robust road tested design.
- Washdown protection package.
- Radiant cooled ribbed gear case. No cumbersome heat shield required.
- Rugged bulls eye sight glasses.

Applications


- Mobile waste handling units, industrial, municipal, wet and dry.
- Pneumatic conveying (fly ash, chemicals, pharmaceuticals, etc).
- Central vacuum systems (packaging, envelope manufacturing, etc).
- Deaeration (chemical, plastics, brick and ceramics, etc.).

Packages

Complete packages available, standard or custom built to customer specifications.



Dimensions Of Bare Shaft Units

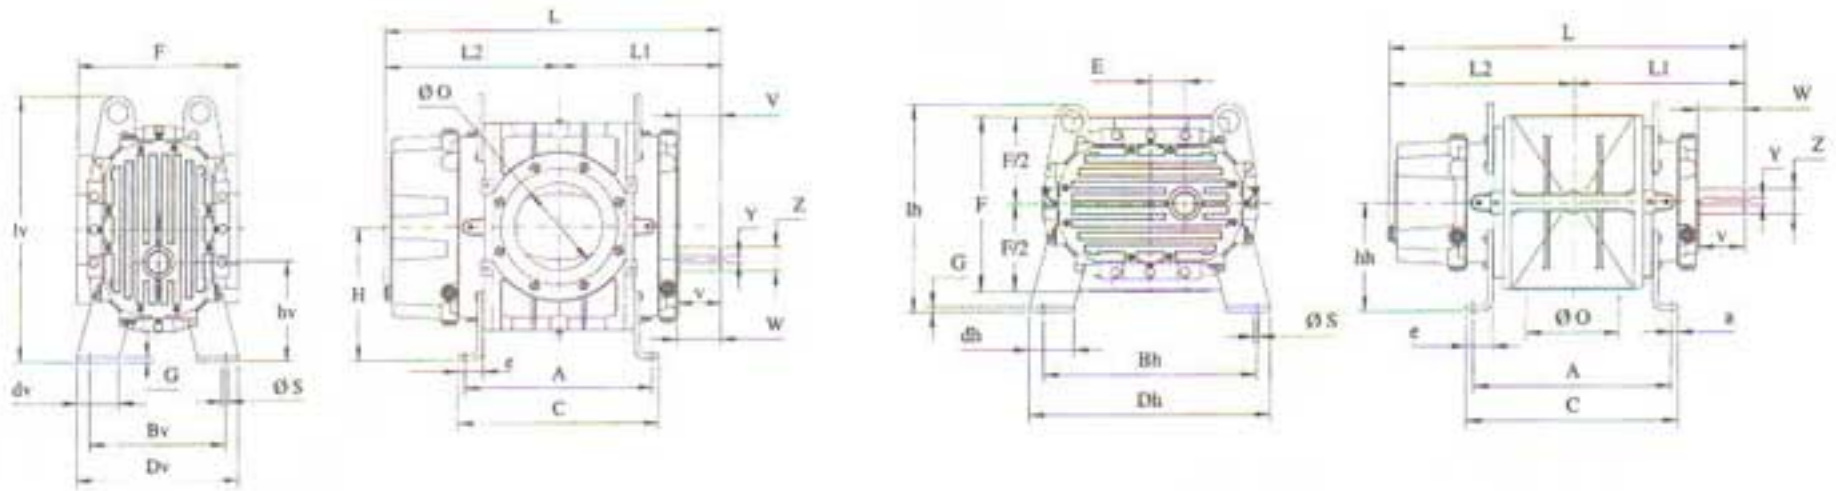

Blower Size	A	a	Bv	Bh	C	Dv	Dh	dv	dh	E	e	F	G	H	hv	hh	Iv	Ih	L	LI	L2	O Dia	S Dia	V	W	Y	Z Dia	Weight Lb
TS32V18	27.50	1.00	7.00	13.00	28.74	8.97	14.97	2.50	2.50	3.00	2.00	15.75	0.39	12.00	9.00	9.00	23.13	17.70	42.35	20.70	21.65	10.00	0.55	3.74	3.90	0.500	2.00	1036
TS56V18	28.00	2.00	15.00	23.00	30.47	20.70	28.07	5.00	5.00	4.00	2.62	18.90	0.47	14.00	10.00	10.00	28.11	20.11	46.78	22.45	24.33	12.00	1.00	4.48	4.70	0.625	2.75	1466

All Dimensions in inches.

Performance Pressure Operation

TS32V18

TS56V18

